














COD. 500002577 REV2


ACERBIS PARTS		O.E.M ITEMS TO USE:	
 A - (1 pcs.)	 H - (1 pcs.)	 I - (1 pcs.)	
 C - (2 pcs.)	 G - (1 pcs.)	 F - (1 pcs.)	
 B - (1 pcs.)	ACERBIS PARTS ONLY FOR US TANKS		
	 G - (1 pcs.)	 F - (1 pcs.)	
	 D - (1 pcs.)	 E - (12 pcs.)	




1. Rimuovere la sella
Remove the seat

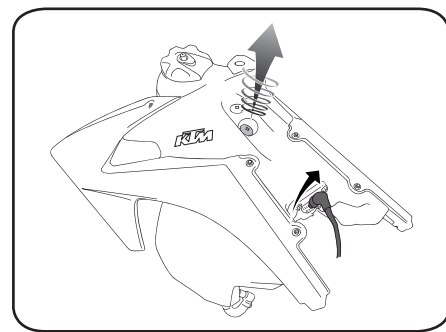


2. Svitare la vite serbatoio. Sconnettere il cavo di alimentazione della pompa
Remove the tank screws. Disconnect the fuel pump power cable

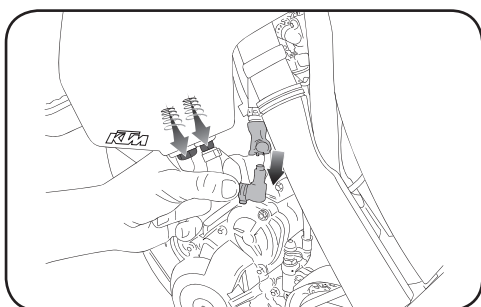


3. Rimuovere le utenze
Remove the fuel line fittings

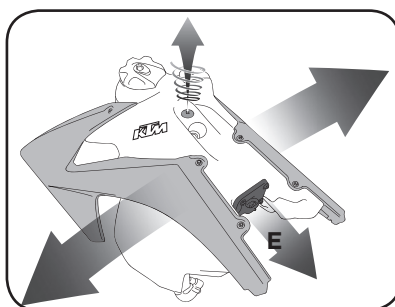


4. Rimuovere i fianchetti, la vite-sella, il serbatoio ktm e la pompa
Remove the radiator scoops, the seat screw, the ktm tank and the fuel pump

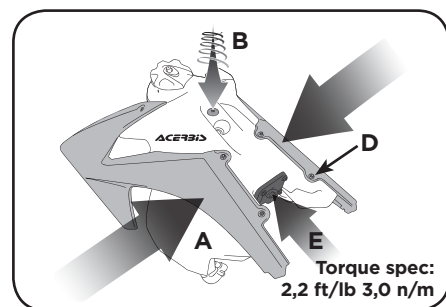


5. Mettere la vite-sella, montare i fianchetti e rimontare la pompa
Install the seat screw, attach the radiator scoops and reassemble the pump
Torque spec:
2,2 ft/lb 3,0 n/m

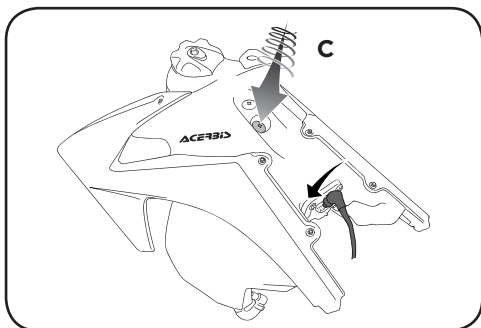

6. Riconnettere il cavo di alimentazione della pompa. Riavvitare la vite serbatoio
Connect the fuel pump power cable. Install the tank screw

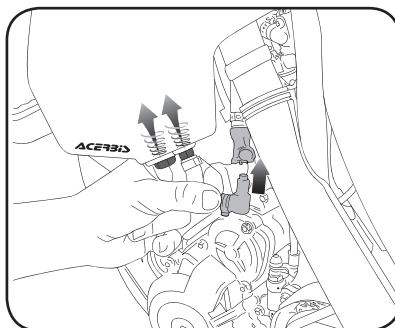

7. Rimontare le utenze
Reassemble the fuel line fittings

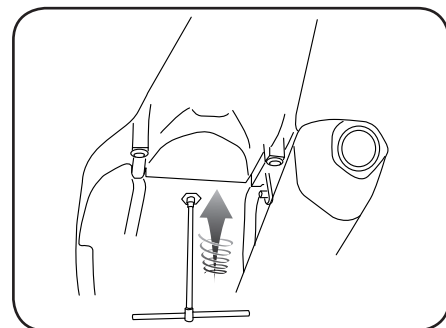

8. Rimontare la sella
Install the seat

WARNING!

Clean tank interior thoroughly before installation. install this fuel tank only in a well ventilated area, as gasoline fumes are extremely dangerous. do not start operate the vehicle if there are any fuel leaks! acerbis recommends that installation be done by licensed mechanic. read all instructions first before beginning installation.

ATTENZIONE!

pulire a fondo l'interno del serbatoio prima dell'installazione. svolgere l'operazione unicamente in un ambiente ventilato, poiché i fumi della benzina sono estremamente pericolosi. non avviare il veicolo se si riscontrano perdite di carburante! acerbis raccomanda l'installazione presso meccanici autorizzati. leggere attentamente le istruzioni prima di iniziare il montaggio.

DISCLAIMER:

DISCLAIMER: Due to uncontrolled variables in the manufacturing process of rotationally molded fuel tanks, the fuel tank may vary in size and shape by up 7% of the manufacturer's original listed capacity.


LIBERATORIA

LIBERATORIA: A causa di variabili inponderabili nel processo di stampaggio rotazionale dei serbatoi, questi possono differire in forma e dimensioni fino al 7% rispetto alla capacità dichiarata.


FOR COMPETITION USE ONLY
SOLO PER USO AGONISTICO

ATTENZIONE: SOLO PER EXC-F 250/350**ATTENTION: ONLY FOR EXC-F 250/350**

1. Rimuovere il tubo-pompa KTM
Remove the KTM pump line

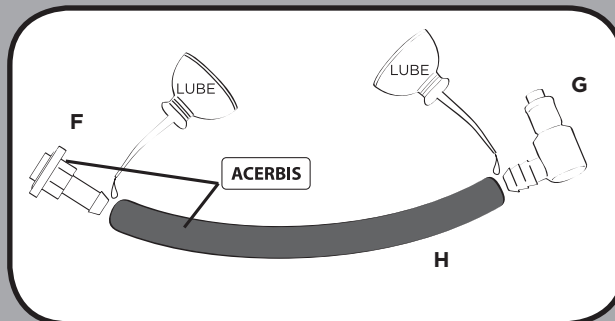

2.

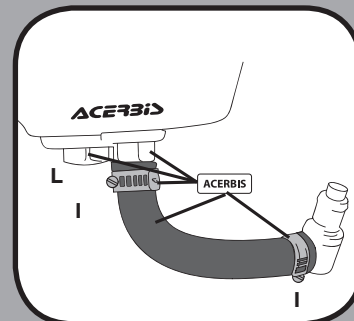

3. Montare il tubo-pompa Acerbis e usare le fascette Acerbis in dotazione
Install the Acerbis pump line and use the Acerbis retaining clips



SOUL AND PASSION

Thank you for purchasing an ACERBIS fuel tank

WARNING

It is **EXTREMELY IMPORTANT** that the fuel tank be properly installed. To ensure proper installation, it is **STRONGLY RECOMMENDED** that the tank be installed only by a qualified OEM licensed dealership mechanic. Improper installation could result in serious injury or even death.

If self-installed NOTE THE FOLLOWING. Particular attention must be paid to excessive fuel line length and fuel line proximity to hot engine areas and pipes to prevent fire.

Clean tank interior thoroughly before installation. Install this fuel tank only in a well ventilated area, as gasoline fumes are extremely dangerous. Do not start or operate the vehicle if there are any fuel leaks! Read all instruction first before beginning installation.

DISCLAIMER

Due to uncontrolled variables in the manufacturing process of rotationally molded fuel tanks, the fuel tank may vary in size and shape by up to 7% of the manufacturer's original listed capacity.