

MOUNTING PARTS



A - (1 pcs)



B - (1 pcs)




C - (5 pcs)



D - (3 pcs)




E - (3 pcs)

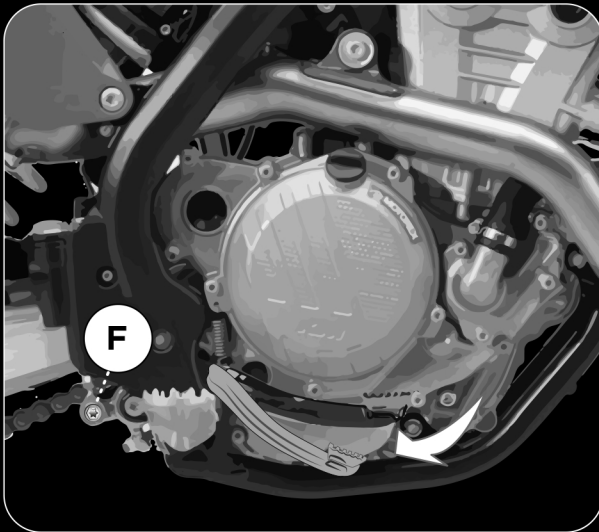


To mount the X-Power, begin by unscrewing the F bolt and lowering the rear brake pedal.

Per facilitare il montaggio del X-Power svitare la vite F del pedale e abbassarlo.

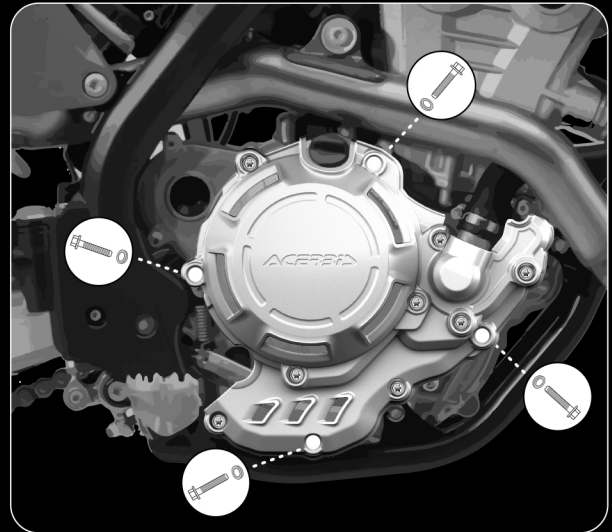

Remove 4 OEM clutch cover bolts exactly as indicated in the image above. Attach the X-Power clutch cover utilizing the 4 OEM bolts and 4 of the included C bushings and then tighten to the manufacturers suggested torque settings as indicated in the owners manual. Re-install the rear brake bolt F. And tighten them to the manufacturers suggested torque settings.


Rimuovere le 4 viti originali indicate in figura. Montare la protezione frizione X-Power con le viti originali e le 4 boccole C. Riposizionare il pedale, e riavvitare la vite F. Coppia di chiusura come riportato su manuale moto.

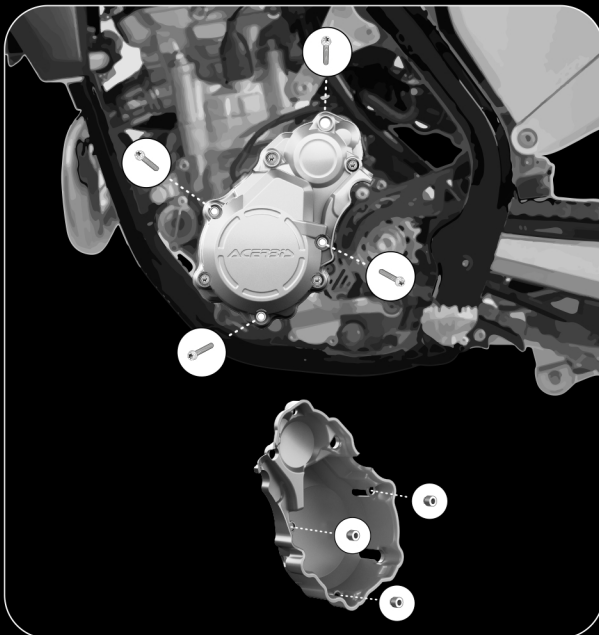

Remove 4 OEM clutch cover bolts exactly as indicated in the image above.

Introduce the 3 bushes D in the clutch protection X-Power.

Rimuovere le 4 viti originali indicate in figura. Inserire le 3 boccole D nella protezione accensione X-Power.

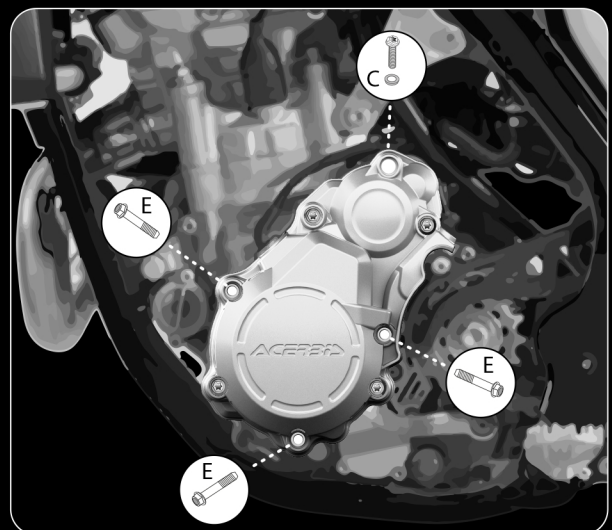

Assemble the ignition protection X-Power with the original screw and the bush C. Fix the X-Power using the 3 screw E. For the torque max check the manual of the motorbike.

Montare la protezione accensione X-Power con la vite originale, la boccola C e le 3 viti E. Coppia di chiusura come riportato su manuale moto.